


## ▼ GX4-12/GX6-14, GX6-14A



## Features >>>

- ◆ Adopt the totally enclosed type case, featured with high security.
- ◆ The installation of traction and straightening motive power adopt adjustable structure, which is easy to maintain.
- ◆ Adopt cartridge valve, featured with compact structure and convenient adjustment.
- ◆ The oil-way controlling part is hidden under the panel which can resist dust effectively.
- ◆ The feed inlet adopt rotary scuff sleeve, featured with simple structure and easy change.
- ◆ Adopt movable operating button, easy to operate.

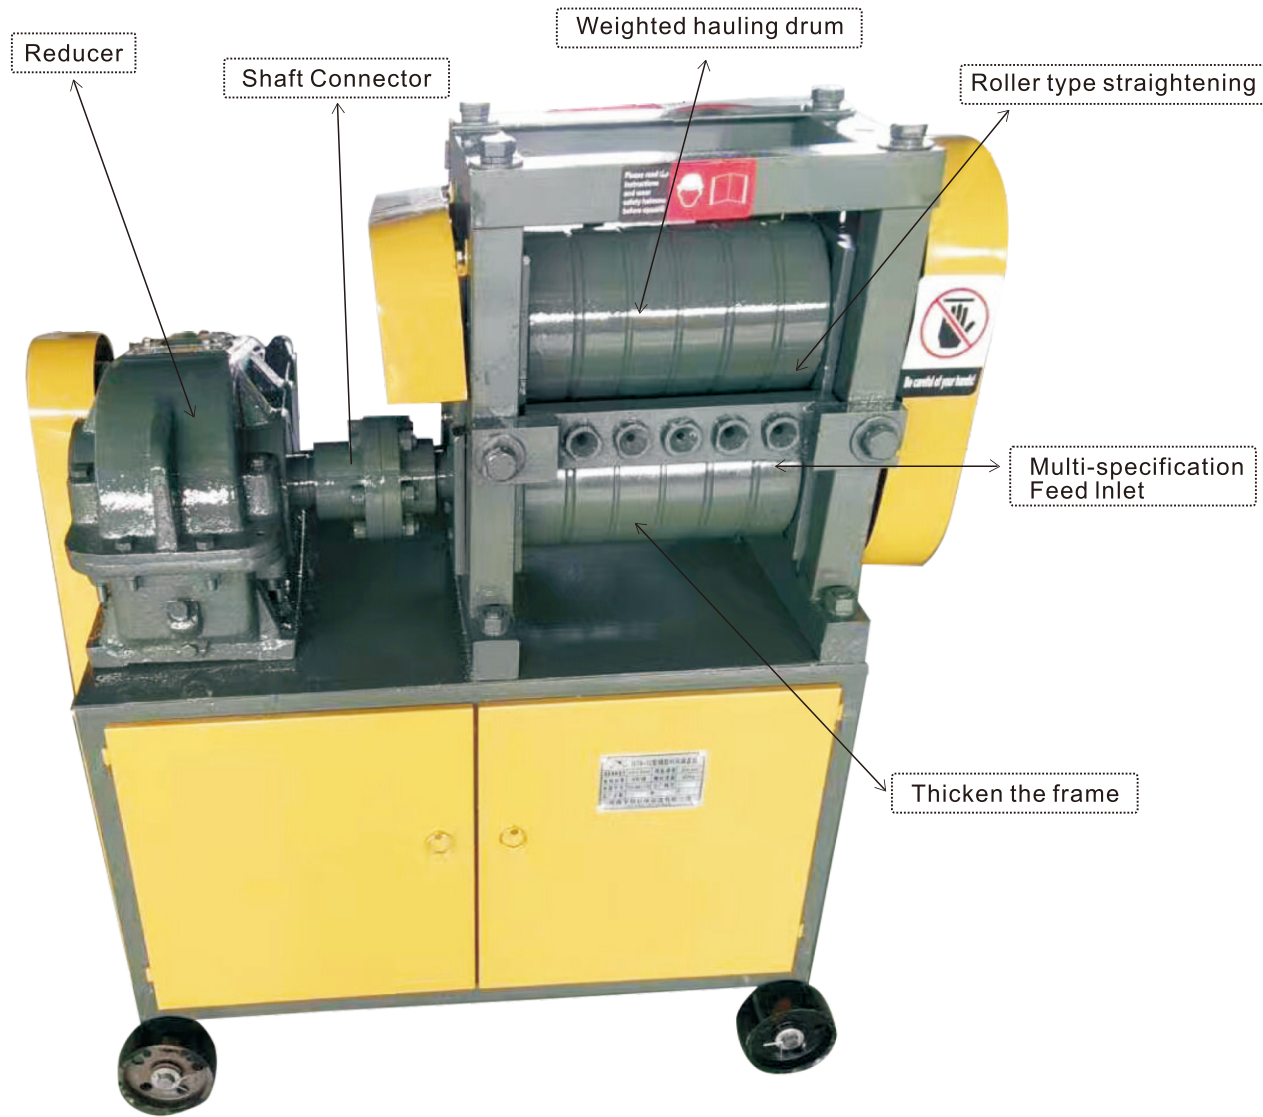

GX4-12/GX6-14



GX6-14A

## Technical parameter >>>

Parameter	Model no.	GX4-12/GX6-14	GX6-14A
Straightening diameter		4-12/14mm	6-14mm
Speed of working		28m/min	30m/min
Cutting space		500-6000mm (can be longer)	
Motor power		(4+2.2/ 5.5+2.2)KW	9.5KW
Packing size		(1100x800x1100/1300x900x1300)mm	1800x1500x850mm
NW / GW		400/720kgs	650kgs / 700kgs