

▼ GW50D, GW42D heavy, GW40D-Sensor type

## Features >>>

- ◆ The motor with international standard motor, which enables steel rod bender machine having a relatively long lifespan. And this steel bar bender can work for a long time continuously.
- ◆ Equipped with stop switch, and its flexibly and reliable to operate.
- ◆ Foot pedal control switch gives the ease of one-man operation for bending rebats.



GW50D Sensor type

GW42D heavy Sensor type

GW40D Sensor type



## Technical parameter >>>

| Parameter                         | Model no. | GW50D           | GW42D heavy                | GW40D           |
|-----------------------------------|-----------|-----------------|----------------------------|-----------------|
| Bend round steel bar diameter     |           | (φ6-φ50)mm      | (φ6-φ40)mm                 | (φ6-φ36)mm      |
| Bend HRB400 ribbed steel diameter |           | (φ6-φ36)mm      | (φ6-φ32)mm                 | (φ6-φ32)mm      |
| Diameter of working disc          |           | φ380mm          | φ360mm                     | φ360mm          |
| Adjustable bending speed          |           | 5-10r/min       | 5-10r/min                  | 5-10r/min       |
| Motor power                       |           | 4KW, 1420r/min  | 3kw brake motor, 1420r/min | 3KW, 1420r/min  |
| Packing size                      |           | 1000x900x850mm  | 830x830x990mm              | 850x800x900mm   |
| NW / GW                           |           | 380kgs / 415kgs | 335kgs / 375kgs            | 280kgs / 320kgs |

▼ GQ72, GQ42, GQ52




72Q-A

GQ42



GQ52

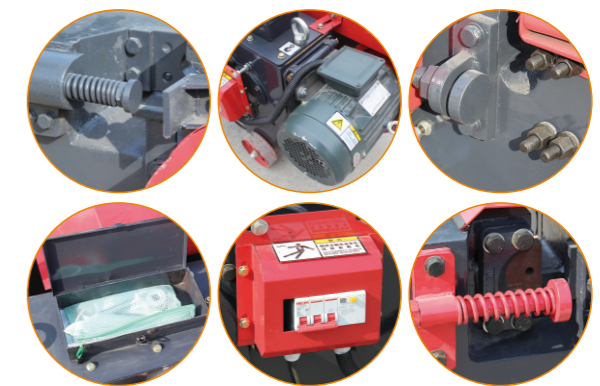

## Technical parameter >>>

| Parameter                        | Model no. | GQ72             | GQ42           | GQ52           |
|----------------------------------|-----------|------------------|----------------|----------------|
| Cut round steel diameter         |           | (φ6-φ55)mm       | (φ6-φ40)mm     | (φ6-φ45)mm     |
| Cut HRB400 ribbed steel diameter |           | (φ6-φ45)mm       | (φ6-φ32)mm     | (φ6-φ36)mm     |
| Motor power                      |           | 5.5kw, 2870r/min | 3kw, 2870r/min | 4kw, 2870r/min |
| Cutting frequency                |           | 28times/min.     | 32times/min.   | 28times/min.   |
| Packing size                     |           | 1600x770x1050mm  | 1000x560x950mm | 1570x570x760mm |
| NW / GW                          |           | 1000kgs/1050kgs  | 380kgs/420kgs  | 480kgs/520kgs  |